

SPINDLE EXTENSIONS series TV, FV



TECHNICAL CHARACTERISTICS

Stem from zinc coated steel
HDPE plastic cover
Top and bottom caps are powder epoxy coated with 250 µm thickness

STREET BOX



TECHNICAL CHARACTERISTICS

Body from ductile iron EN-GJL-200
Anticorrosion painting
Zinc coated bolt holds the cover in place (4050 version)





OTHER PRODUCTS

DN	SQ	Lmin	Lmax	BLUCAST ref. no.
20-32	12	1300	1800	TV1318SQ12
20-50	14	1300	1800	TV1318SQ14
65-80	17	1300	1800	TV1318SQ17
100-150	19	1300	1800	TV1318SQ19
200	24	1300	1800	TV1318SQ24
250-400	27	1300	1800	TV1318SQ27
500-600	32	1300	1800	TV1318SQ32
20-32	12	2000	2500	TV2025SQ12
20-50	14	2000	2500	TV2025SQ14
65-80	17	2000	2500	TV2025SQ17
100-150	19	2000	2500	TV2025SQ19
200	24	2000	2500	TV2025SQ24
250-400	27	2000	2500	TV2025SQ27
500-600	32	2000	2500	TV2025SQ32
25-600	12-32	600	600	FV06SQ/...
25-600	12-32	1000	1000	FV10SQ/...
25-600	12-32	1500	1500	FV15SQ/...
25-600	12-32	2000	2000	FV20SQ/...

*custom lengths available by request

	L	d	weight	BLUCAST ref. no.
small	150	110	2.9	4050
big	270	185	11	4056

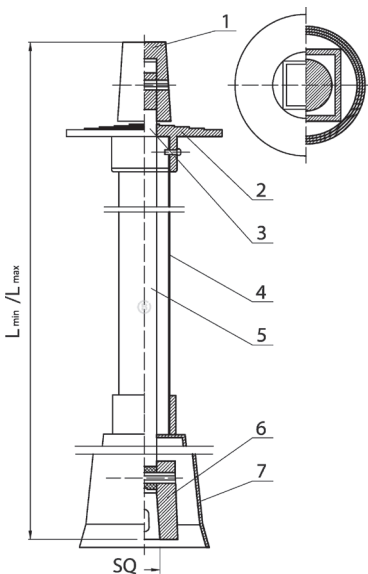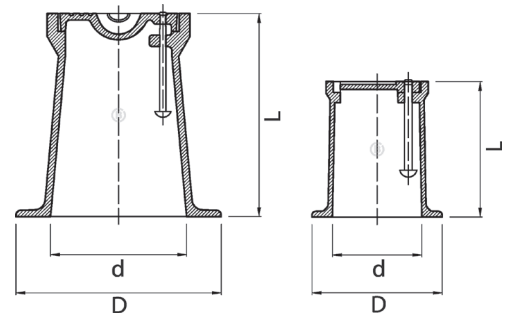

No.	Item	Material
1	Top cap	EN-GJL-250
2	Flange	HDPE
3	Connector	Galvanized steel
4	Cover	HDPE
5	Telescopic spindle	Galvanized steel
6	Bottom cap	EN-GJL-250
7	Bell	HDPE

All illustrations, technical data, dimensions (in mm) and weights (all weights specified in kg) are non-binding and are subject to change

