

REFERENCE	DESCRIPTION	POSITION	CAPACITY	OUTPUT	VOLTAGE	FREQUENCY	EAN 13	SAP CODE
241057	DURALIS ACI HYB VM 050L 1200M MONO	WM	50 L	1200	220-240V	50-60 HZ	3546332410577	100024105710
251068	DURALIS ACI HYB VM 075L 1200M MONO	WM	75 L	1200	220-240V	50-60 HZ	3546332510680	100025106800
251072	DURALIS ACI HYB VM 100L 1200M MONO	WM	100 L	1200	220-240V	50-60 HZ	3546332510727	100025107200
271112	DURALIS ACI HYB VM 150L 1800M MONO	WM	150 L	1800	220-240V	50-60 HZ	3546332711124	100027111200
251079	DURALIS ACI HYB VM 200L 2200M MONO	WM	200 L	2200	220-240V	50-60 HZ	3546332510796	100025107900
861411	DURALIS VM COMPACT 100L 1200M	WM	100 L	1200	220-240V	50-60 HZ	3546338614115	100086141100
861412	DURALIS VM COMPACT 150L 1800M	WM	150 L	1800	220-240V	50-60 HZ	3546338614122	100086141200
861413	DURALIS VM COMPACT 200L 2200M	WM	200 L	2200	220-240V	50-60 HZ	3546338614139	100086141300
272039	DURALIS VS 150L 1800M	VS	150 L	1800	TC	50 HZ	3546332720393	100027203900
272040	DURALIS VS 200L 2200M	VS	200 L	2200	TC	50 HZ	3546332720409	100027204000
272041	DURALIS VS 250L 3000M	VS	250 L	3000	TC	50 HZ	3546332720416	100027204100
292077	DURALIS VS 300L 3000M	VS	300 L	3000	TC	50 HZ	3546332920779	100029207700
263124	DURALIS HM 100L 1800M	HM	100 L	1800	230 V	50 HZ	3546332631248	100026312400
263125	DURALIS HM 150L 1800M	HM	150 L	1800	230 V	50 HZ	3546332631255	100026312500
263126	DURALIS HM 200L 2200M	HM	200 L	2200	230 V	50 HZ	3546332631262	100026312600

**KEY SELLING POINTS & PRODUCTS ADVANTAGES**

Made to last



Quality and longevity of the water tanks to ACI Hybrid technology



Easy maintenance  
No need to drain the tank



Ceramic heating element - steatite adapted to all kinds of water


	GENERAL SPECIFICATION
HEATING ELEMENT	DRY
HEATING ELEMENT MATERIAL	STEATITE
TANK PROTECTION 1	TITANIUM
TANK PROTECTION 2	MAGNESIUM
TANK MATERIAL	ENAMELED STEEL
EXTERNAL MATERIAL	PAINTED STEEL
INSTALLATION TYPE	WM / FS / HM
PRODUCT MAIN COLOR	WHITE
TOP COLOR	WHITE
BOTTOM COLOR	WHITE
HMI COLOR	N/A
TYPE OF INTERFACE	N/A
THERMOSTAT	ELECTRONIC
SAFETY VALVE	N/A
DIELECTRIC UNION	BI METALIC x1
THERMOMETER	NO

**PRODUCT**

**WM cut view**

- High quality enamel
- High density insulated foam (free of CFC)
- Steatite heating element
- Electronic thermostat
- Titanium & Mg anode ACI hybrid
- Optimized stainless steel outlet pipe
- Optimized inlet diffuser

	FUNCTIONS
ON / OFF SWITCH	N/A
POWER INDICATOR	N/A
HEATING INDICATOR	N/A
SHOWER READY INDICATOR	N/A
TEMPERATURE SETTING	N/A
TEMPERATURE DISPLAY	N/A
MANUAL MODE	N/A
SMART/ECO+ MODE	N/A
ABSENCE MODE	N/A
MAX MODE	N/A
BOOST MODE	N/A
CONNECTIVITY	N/A
ERROR INDICATOR	N/A

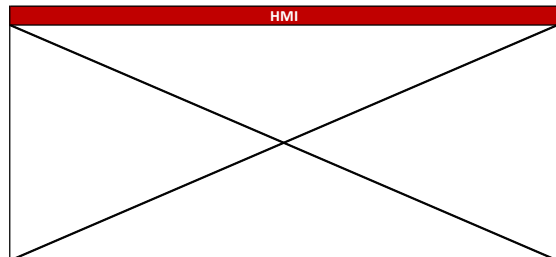

**INSTRUCTION BOOK**  
Duralis instruction booklet

... TRANSLATED INTO :  
2 languages




French / Néerlandais

**BRAND STICKER**  
Thermor

ELECTRIC SUPPLY	
CABLE	No
PLUG	No


**HEATING LIGHT**  
For WM & FS only

WM FS



# TH DURALIS ACI HYBRIDE

## INSTALLATION DIMENSIONS

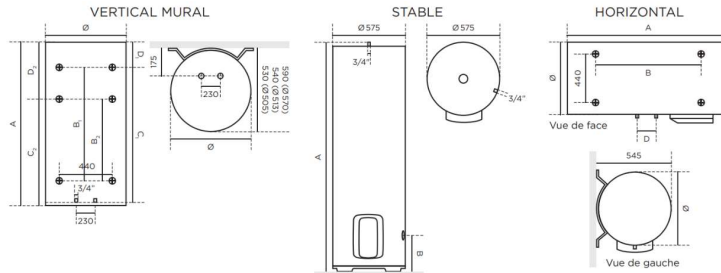

REFERENCE	DESCRIPTION	POSITION	CAPACITY	OUTPUT (W)	VOLTAGE (V)	DIMENSIONS (MM)								NET WEIGHT (KG)
						ø	A	B1	B2	C1	C2	D1	D2	
241057	DURALIS ACI HYB VM 050L 1200M MONO	WM	50 L	1200	220-240V	505	575	-	-	370	-	155	-	18
251068	DURALIS ACI HYB VM 075L 1200M MONO	WM	75 L	1200	220-240V	513	705	-	-	570	-	135	-	23
251072	DURALIS ACI HYB VM 100L 1200M MONO	WM	100 L	1200	220-240V	513	835	-	-	750	565	85	265	27
271112	DURALIS ACI HYB VM 150L 1800M MONO	WM	150 L	1800	220-240V	513	1155	800	500	1050	750	105	405	35
251079	DURALIS ACI HYB VM 200L 2200M MONO	WM	200 L	2200	220-240V	513	1475	800	700	1050	950	425	525	45
861411	DURALIS VM COMPACT 100L 1200M	WM	100 L	1200	220-240V	570	740	-	-	570	-	165	-	30
861412	DURALIS VM COMPACT 150L 1800M	WM	150 L	1800	220-240V	570	990	500	-	750	-	235	-	39
861413	DURALIS VM COMPACT 200L 2200M	WM	200 L	2200	220-240V	570	1245	800	700	1050	950	190	290	46
272039	DURALIS VS 150L 1800M	VS	150 L	1800	TC	575	1015	280	-	-	-	-	-	42
272040	DURALIS VS 200L 2200M	VS	200 L	2200	TC	575	1270	280	-	-	-	-	-	47
272041	DURALIS VS 250L 3000M	VS	250 L	3000	TC	575	1510	280	-	-	-	-	-	53
292077	DURALIS VS 300L 3000M	VS	300 L	3000	TC	575	1765	280	-	-	-	-	-	60
263124	DURALIS HM 100L 1800M	HM	100 L	1800	230 V	520	830	600	-	-	-	100	-	29
263125	DURALIS HM 150L 1800M	HM	150 L	1800	230 V	520	1150	800	-	-	-	100	-	37
263126	DURALIS HM 200L 2200M	HM	200 L	2200	230 V	520	1470	1050	-	-	-	100	-	45


\*Real capacity

REFERENCE	DESCRIPTION	PROFIL	HEAT UP TIME FROM 15° TO 65°	V40 (L)*	QPR (kWh/24h)**	ENERGY CLASS
241057	DURALIS ACI HYB VM 050L 1200M MONO	M	2h36	-	0.82	C
251068	DURALIS ACI HYB VM 075L 1200M MONO	M	4h04	142	1.08	C
251072	DURALIS ACI HYB VM 100L 1200M MONO	L	5h27	177	1.28	C
271112	DURALIS ACI HYB VM 150L 1800M MONO	M	5h14	277	1.65	C
251079	DURALIS ACI HYB VM 200L 2200M MONO	L	5h44	374	1.94	C
861411	DURALIS VM COMPACT 100L 1200M	L	5h29	177	1.15	C
861412	DURALIS VM COMPACT 150L 1800M	M	5h09	278	1.44	C
861413	DURALIS VM COMPACT 200L 2200M	L	5h53	369	1.74	C
272039	DURALIS VS 150L 1800M	M	4h19	276	1.58	C
272040	DURALIS VS 200L 2200M	M	5h14	376	1.87	C
272041	DURALIS VS 250L 3000M	L	4h58	435	2.3	C
292077	DURALIS VS 300L 3000M	L	6h18	537	2.36	C
263124	DURALIS HM 100L 1800M	L	2h51	161	1.03	C
263125	DURALIS HM 150L 1800M	M	4h24	237	1.46	C
263126	DURALIS HM 200L 2200M	L	4h31	310	1.75	C

\*Available hot water at 40°C

\*\*Standing loss at 65°C in 24hours

REFERENCE	DESCRIPTION	PACKED DIMENSIONS (LxWxH) [MM]	GROSS WEIGHT (KG)	NUMBER OF PIECES PER CONTENER
241057	DURALIS ACI HYB VM 050L 1200M MONO	575x575x620	18.5	-
251068	DURALIS ACI HYB VM 075L 1200M MONO	575x575x705	25	-
251072	DURALIS ACI HYB VM 100L 1200M MONO	575x575x875	29	-
271112	DURALIS ACI HYB VM 150L 1800M MONO	575x575x1195	38	-
251079	DURALIS ACI HYB VM 200L 2200M MONO	575x575x1515	48	-
861411	DURALIS VM COMPACT 100L 1200M	600x600x785	33	-
861412	DURALIS VM COMPACT 150L 1800M	600x600x1035	42	-
861413	DURALIS VM COMPACT 200L 2200M	600x600x1035	49	-
272039	DURALIS VS 150L 1800M	600x600x1050	45	-
272040	DURALIS VS 200L 2200M	600x600x1305	50	-
272041	DURALIS VS 250L 3000M	600x600x1545	57	-
292077	DURALIS VS 300L 3000M	600x600x1800	64	-
263124	DURALIS HM 100L 1800M	575x575x900	34	-
263125	DURALIS HM 150L 1800M	575x575x1220	42	-
263126	DURALIS HM 200L 2200M	575x575x1540	51	-



SAFETY	
IP RATING WM	IP 25
IP RATING FS	IP 24
IP RATING HM	IP 24

**WM**

**HM**

**FS**

STANDARDS
CE / NF